

ASSEMBLY INSTRUCTIONS FOR DRAWER REMOVAL AND REINSTALL FOR CASEGOODS


TO REMOVE DRAWER:

STEP 1 : OPEN THE DRAWER TO ITS FULL EXTENSION


STEP 2 : LOCATE THE DRAWER SLIDE LOCK ON EACH SIDE OF THE DRAWER BOX. PULL UP THE LOCK ON THE LEFT SIDE OF THE DRAWER BOX AND PUSH DOWN THE LOCK ON THE RIGHT SIDE OF THE DRAWER BOX AT THE SAME TIME AND PULL DRAWER STRAIGHT OUT UNTIL THE ENTIRE DRAWER IS DISCONNECTED.

STEP 3 : REMOVE THE DRAWER



Lock




STEP 1

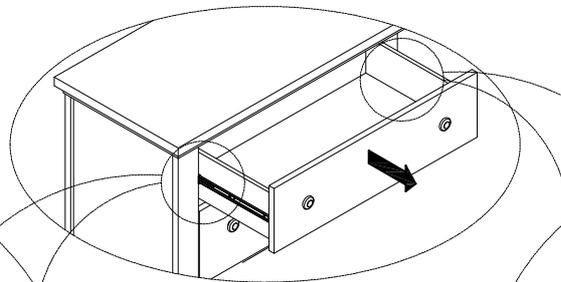

Lock

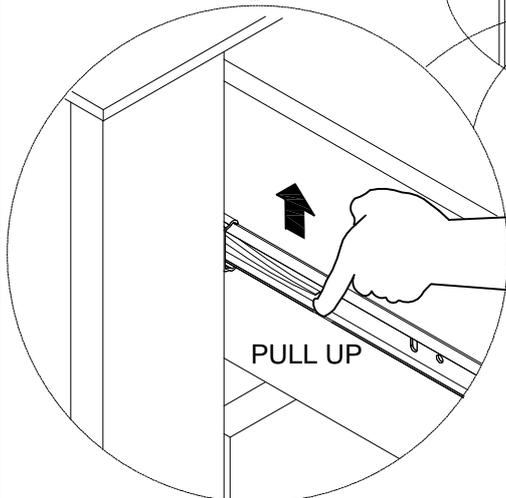


STEP 2

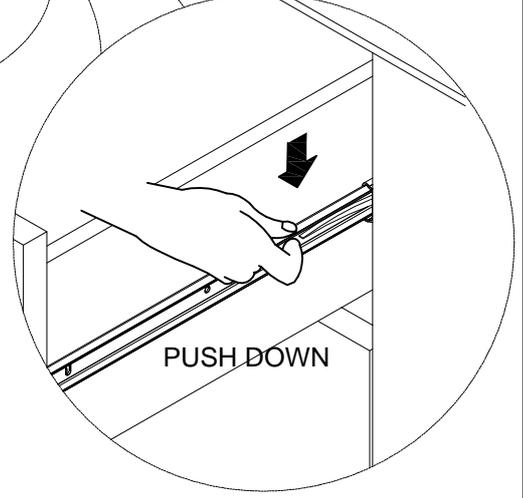

STEP 2

STEP 3

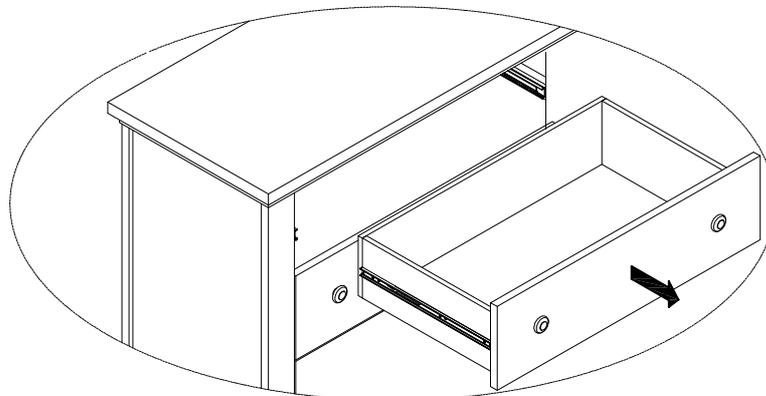

TO REINSTALL DRAWER :

MAKE SURE THE DRAWER IS ALIGNED TO ITS ORIGINAL POSITION.

STEP 1 : INSERT DRAWER BY PULLING CABINET TRACKS ON BOTH SIDES.
ALL THE WAY OUT (INCLUDING BALL BEARING RACK)

STEP 2 : ALIGN TRACKS ON DRAWER WITH SLIDERS AND PUSH IN THE DRAWER
UNTIL THERE IS AUDIBLE "CLICK" SOUND

STEP 3 : CHECK FOR PROPER ALIGNMENT BY INSPECTING DRAWER FRONT EDGES
FOR SPACING AND SQUARENESS.
OPEN AND CLOSE SLOWLY SEVERAL TIMES TO ENSURE PROPER INSTALLATION.

IF THE DRAWER FRONTS ARE UNEVEN, PLEASE REPEAT THE ENTIRE PROCESS.

